

PEX-A Oxygen Barrier Pipe

Job Name _____

Location _____

Engineer _____

Contractor _____

Tag _____ PO# _____

Specifications

- Approved for use with F1960 expansion fittings
- Flexible and easy to install
- Freeze, corrosion, and chlorine resistant

Applications


- Hot and cold water distribution systems
- Radiant/Hydronic applications

Materials

- Crosslinked Polyethylene

Certifications/Listings/Approvals

- NSF certified to ASTM F876/877 and CSA B137.5 per NSF14
- NSF/ANSI 14 approved
- ASTM E84, F876, F877, and F2023 approved



Chlorine/UV Resistance

- 5106

Pressure and Temperature Ratings (Hydrostatic)

- 73°F at 160 psi (23°C at 11 bar)
- 180°F at 100 psi (82°C at 6.9 bar) *
- 200°F at 80 psi (93°C at 5.5 bar) *


* Ratings stated are hydrostatic ratings. For domestic hot water and hot water recirculation, do not exceed 140°F at 80 psi (60°C at 5.5bar).

Linear Expansion Rate

- JS PEX-A expands and contracts at a rate of 1.1" per 100' per 10 degree change in temperature (delta T)

Minimum Bending Radius

- Minimum bend radius is 6x the Outer Diameter (OD) of the pipe. If using coiled piping and bending against the coil direction, the minimum bend radius should be increased by three.
- JS recommends a minimum distance of 2x the OD before changing pipe direction.

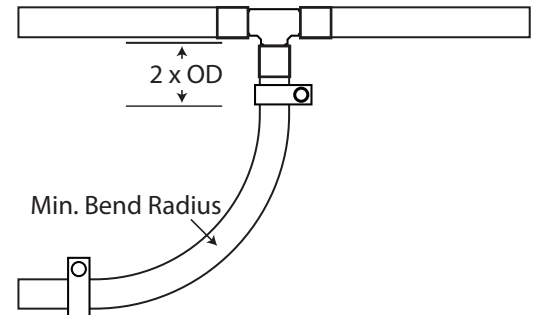

Tubing Size	Min Bending Radius	2 x (OD)
.50"	3.75" (95mm)	1.25"
.63"	4.50" (114mm)	1.50"
.75"	5.25" (133mm)	1.75"
1.00"	6.75" (171mm)	2.25"
1.25"	8.25" (210mm)	2.75"
1.50"	9.75" (248mm)	3.25"

Dimensions and Product Offering

Part Code	Description	OD	OD Tolerance	Wall Thickness	Wall Thickness Tolerance
F76817	1/2" x 20' White Oxygen Barrier, 25 Straights	0.625"	±0.004"	0.070"	+0.010"
F76818	1/2" x 100' White Oxygen Barrier, Coil	0.625"	±0.004"	0.070"	+0.010"
F76819	1/2" x 300' White Oxygen Barrier, Coil	0.625"	±0.004"	0.070"	+0.010"
F76820	1/2" x 500' White Oxygen Barrier, Coil	0.625"	±0.004"	0.070"	+0.010"
F76821	1/2" x 1000' White Oxygen Barrier, Coil	0.625"	±0.004"	0.070"	+0.010"
F76822	5/8" x 20' White Oxygen Barrier, 15 Straights	0.750"	±0.004"	0.083"	+0.010"
F76823	5/8" x 100' White Oxygen Barrier, Coil	0.750"	±0.004"	0.083"	+0.010"
F76824	5/8" x 300' White Oxygen Barrier, Coil	0.750"	±0.004"	0.083"	+0.010"
F76825	5/8" x 400' White Oxygen Barrier, Coil	0.750"	±0.004"	0.083"	+0.010"
F76826	5/8" x 1000' White Oxygen Barrier, Coil	0.750"	±0.004"	0.083"	+0.010"
F76083	3/4" x 20' White Pipe, Pack of 15 Straight Lengths	0.875"	±0.004"	0.097"	+0.010"
F76827	3/4" x 100' White Oxygen Barrier, Coil	0.875"	±0.004"	0.097"	+0.010"
F76828	3/4" x 300' White Oxygen Barrier, Coil	0.875"	±0.004"	0.097"	+0.010"
F76829	3/4" x 500' White Oxygen Barrier, Coil	0.875"	±0.004"	0.097"	+0.010"
F76830	3/4" x 1000' White Oxygen Barrier, Coil	0.875"	±0.004"	0.097"	+0.010"
F76914	1" x 20' White Pipe Pack of 10 Straight Lengths	1.125"	±0.005"	0.125"	+0.013"
F76915	1" x 100' White Pipe Coil	1.125"	±0.005"	0.125"	+0.013"
F76916	1" x 300' White Pipe Coil	1.125"	±0.005"	0.125"	+0.013"
F76013	1-1/4" x 20' White Oxygen Barrier, 5 Straights	1.375"	±0.005"	0.161"	+0.015"
F76016	1-1/4" x 100' White Oxygen Barrier, Coil	1.375"	±0.005"	0.161"	+0.015"
F76019	1-1/4" x 300' White Oxygen Barrier, Coil	1.375"	±0.005"	0.161"	+0.015"
F76014	1-1/2" x 20' White Oxygen Barrier, 5 Straights	1.625"	±0.006"	0.191"	+0.019"
F76017	1-1/2" x 100' White Oxygen Barrier, Coil	1.625"	±0.006"	0.191"	+0.019"
F76020	1-1/2" x 300' White Oxygen Barrier, Coil	1.625"	±0.006"	0.191"	+0.019"
F76015	2" x 20' White Oxygen Barrier, 5 Straights	2.125"	±0.006"	0.248"	+0.024"
F76018	2" x 100' White Oxygen Barrier, Coil	2.125"	±0.006"	0.248"	+0.024"