


BasinPro™

a product of Jones Stephens Corp.


Lavatory Nut Removal Tool

- Notched ends designed to self-center on 2, 3, 4, and 6-tab nuts and to fit metal and plastic 1" hex nuts
- Allows for easy reach of plastic nuts on both residential and commercial faucets

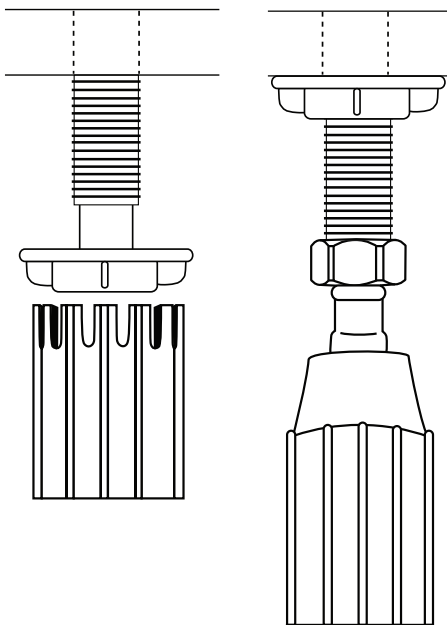

INSTRUCTIONS TO REMOVE INSTALLED FAUCET

1. Shut off all water to the faucet that you will be working on.
2. Detach the supply line from the supply stop and insert the loose end of the supply line into the larger end of the BasinPro™ Removal Tool. Using the supply line as a guide, engage the lavatory nut with the teeth of the BasinPro™ Removal Tool. Turn the tool counterclockwise until the nut is free. Repeat on the remaining nut.
3. Flip the BasinPro™ Removal Tool to the smaller end. Using the supply line as a guide once again, engage the supply line nut with the recessed hex in the BasinPro™. Turn counterclockwise until the supply line nut is disengaged. Repeat on the other line.
4. Remove faucet from the top of the counter and you are done.

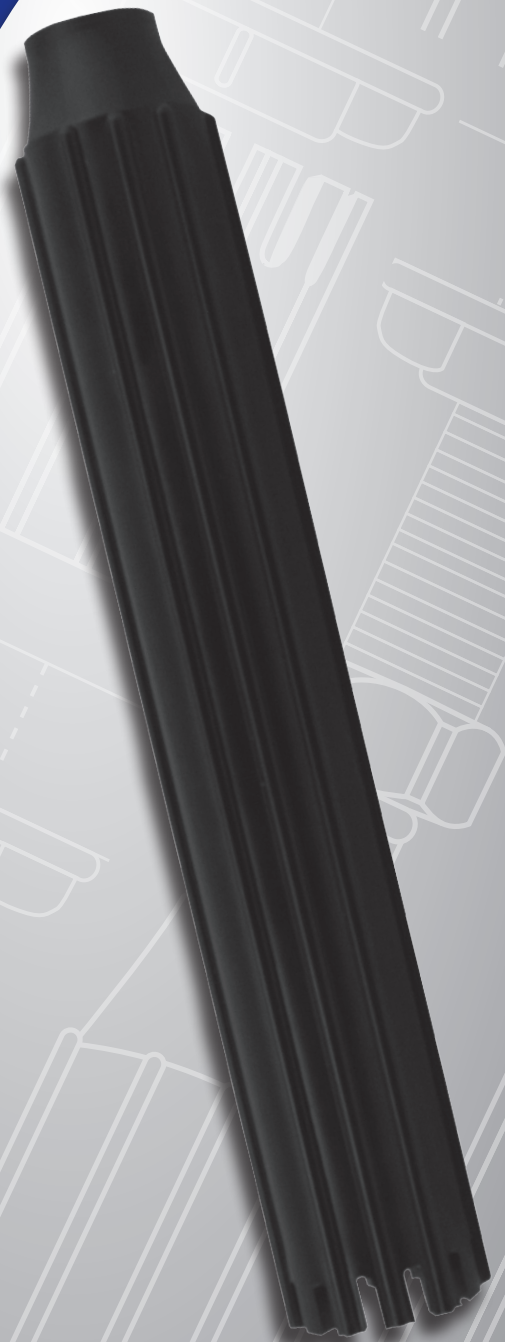

JSC South
3249 Moody Parkway
Moody, AL 35004
Phone 800-355-6637
Fax 800-462-6991

JSC North
50 Keystone Blvd. East
Pottsville, PA 17901
Phone 800-325-8999
Fax 866-922-0076